

SRK-ZMA-S

Reverse Cycle Inverter

Hyper Inverter



SRK20ZMA-S • SRK25ZMA-S • SRK35ZMA-S • SRK50ZMA-S



SRC20ZMA-S • SRC25ZMA-S
SRC35ZMA-S




SRC50ZMA-S



Most SRK-ZMA-S series can be selected for use as indoor units in combination with the SCM Multi system outdoor unit.

Refrigerant Pipe Length




SRK20ZMA-S • SRK25ZMA-S • SRK35ZMA-S

Refrigerant Pipe Length



SRK50ZMA-S

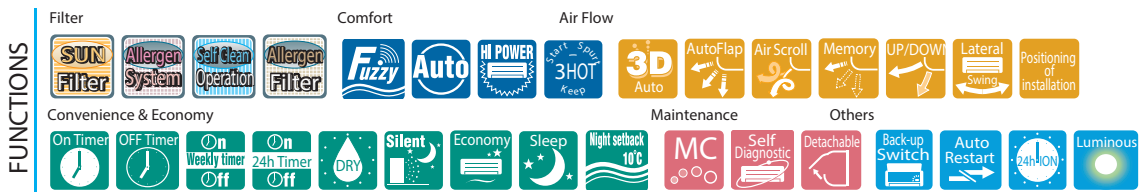

Indoor		SRK20ZMA-S	SRK25ZMA-S	SRK35ZMA-S	SRK50ZMA-S
Outdoor		SRC20ZMA-S	SRC25ZMA-S	SRC35ZMA-S	SRC50ZMA-S
Power supply		1 Phase 220~240V 50Hz			
Capacity	Cooling T1	2.0 (1.0~2.7)	2.5 (1.0~2.9)	3.3 (1.0~3.8)	5.0 (1.6~5.5)
	Heating H1	2.7 (1.2~3.9)	3.2 (1.2~4.6)	4.0 (1.3~4.8)	5.8 (1.6~6.6)
	Heating H2	3.23	3.79	4.04	5.19
Input	Cooling T1	0.44 (0.21~0.77)	0.575 (0.27~0.81)	0.87 (0.21~1.20)	1.55 (0.40~2.20)
	Heating H1	0.62 (0.27~1.38)	0.70 (0.27~1.36)	0.955 (0.29~1.45)	1.59 (0.42~2.10)
Energy label	Cooling T1	4	4	3	1.5
	Heating H1	4	4.5	4	2.5
EER	Cooling T1	4.55	4.35	3.79	3.23
COP	Heating H1	4.35	4.57	4.19	3.65
	Heating H2	2.64	2.62	2.80	2.40
Sound power level (JIS C9612)	Cooling (Outdoor)	59	58	60	61
	Heating (Outdoor)	58	59	61	63
Sound pressure level (JIS C9612)	Cooling (Indoor)	33-27-24-21	34-28-24-21	45-32-26-22	46-37-28-25
	Heating (Indoor)	36-31-24-21	39-31-24-21	42-37-25-22	45-37-31-27
Silent mode sound pressure level	Cooling (Outdoor)	42	41	45	43
	Heating (Outdoor)	45	42	43	45
Airflow	Cooling (Indoor)	130-93-88-80	132-100-88-83	190-107-90-83	188-130-100-88
	Heating (Indoor)	163-105-83-75	183-108-85-77	213-157-102-80	225-170-125-103
External dimensions (HxWxD)	Indoor	294x798x229			
	Outdoor	540x780(+62)x290	595x780(+62)x290		640x800(+71)x290
Net weight	Indoor	9.5			
	Outdoor	31.5	35		41
Refrigerant piping	Liquid line	Ø6.35			
	Gas line	Ø9.52			Ø12.7
	Connection method	Flare connection			
Refrigerant R410A	Quantity	0.75	1.15		1.35
	Pre charged to pipe length	15			
Clean filter	Allergen Clear & Photocatalytic Washable Deodorizing Filter				